



GD-509UD Linear Luminaire

Type: _____
Project: _____
Catalog#: _____




Main Features

- Suited for indoor applications
- Surge protector
- Different colour temperatures can be selected
- Bilateral facing lights (up and down)


Technical Information

GD-509UD



*All units in mm

Installation Diagram

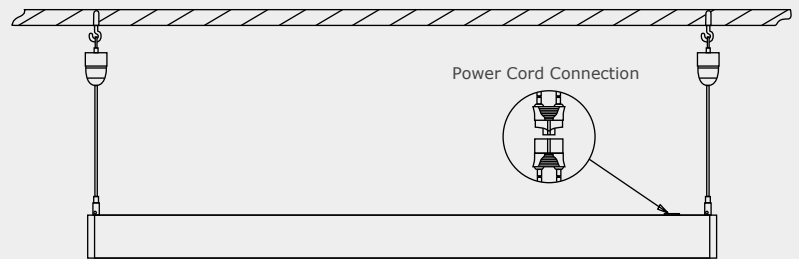

Specification Features

Model		GD-509-UD	
Lumen Output	4400 lm		
Power Consumption (W)	40 W (25W Down, 15W Up)		
Efficacy	110 lm/W		
Input Voltage	120-277V AC, 347V AC		
Colour Temperature (CCT)	3000K, 3500K, 4000K		
CRI	Ra 80		
PFC	< 0.95		
Certification	cULus		
Warranty	5 Years		

Order form

Series		Model		Voltage		Colour Temperature		Option							
GD	GD	509UD	509UD	A	120-277V AC	30	3000K	40	4000K	DM	0-10V Dimming	DH	Daylight Harvesting	EB	Emergency Backup
				B	347V AC	35	3500K			OS	Occupancy Sensor	TR	TRIAC Dimming		
		Housing													
WH	White														
BL	Black														