

TYPE:

PROJECT:

CATALOG#:

STREAM FLOW LINEAR LIGHT



## Product Features


GD-SFX is a stream flow linear light comes in 2', 4' and 8' lengths. The input voltage of the light is 120-277V or 347V (universal input voltage). With 50,000 hours of lifespan and five years warranty. Standard 0-10V DC Dimming.



## Product Specifications

Model	GD-SF2-22	GD-SF4-42	GD-SF4-60	GD-SF8-83
Lumen Output	2860 lm	5460 lm	7800 lm	10790 lm
Power Consumption	22 W	42 W	60 W	83 W
Efficacy	130 lm/W	130 lm/W	130 lm/W	130 lm/W
Input Voltage	120-277V AC, 347V AC, 120-347V AC	120-277V AC, 347V AC, 120-347V AC	120-277V AC, 347V AC, 120-347V AC	120-277V AC, 347V AC, 120-347V AC
Colour Temperature	3500K, 4000K	3500K, 4000K	3500K, 4000K	3500K, 4000K
Dimensions	24.4 x 4.4 x 3.5 inches	48 x 4.4 x 3.5 inches	48 x 4.4 x 3.5 inches	96 x 4.4 x 3.5 inches
IP Rating	IP44	IP44	IP44	IP44
Weight	2.33 kg	3.99 kg	3.99 kg	6.37 kg

## Technical Drawing

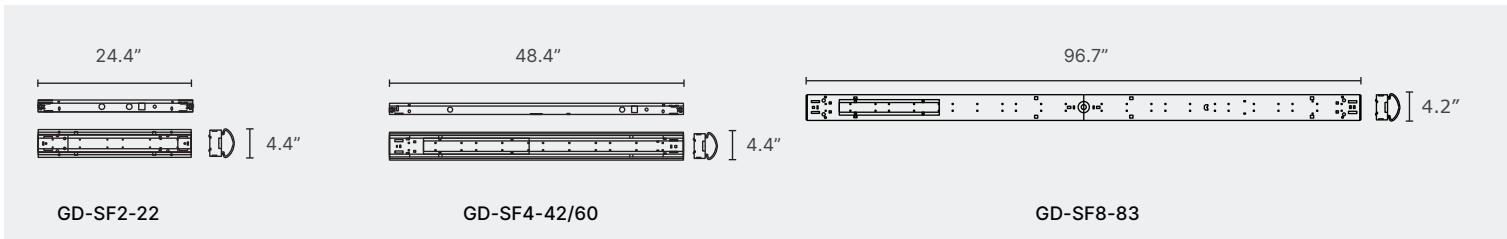

## Order Form

GD	Series	Model	3	4	5	6	7
<b>2. MODEL</b>	<b>SF</b>	<b>3. WATTAGE</b>	<b>22</b> 22 W   <b>60</b> 60 W	<b>35</b> 3500K   <b>40</b> 4000K	<b>5. VOLTAGE</b>	<b>6. MOUNTING</b>	<b>7. OPTION</b>
			<b>42</b> 42 W   <b>83</b> 83 W		<b>A</b> 120-277V AC   <b>B</b> 347V AC   <b>C</b> 120-347V AC	<b>WM</b> Wall Mount   <b>HN</b> Hook Mount   <b>PM</b> Pendant Mount	<b>OS</b> Occupancy Sensor   <b>BI</b> Bi-Level PIR Sensor   <b>DL</b> DALI Driver

TYPE:


PROJECT:

CATALOG#:


# Microwave Dimming Sensor

## 3-step dimming function


Lamps in corridor are controlled by several sensors. Once any motion is detected by one of sensors, the motion signal will be transmitted to other sensors connected together. Then, all lamps switch on at the same time, instead of switching on the lamps in the area where motion is detected.

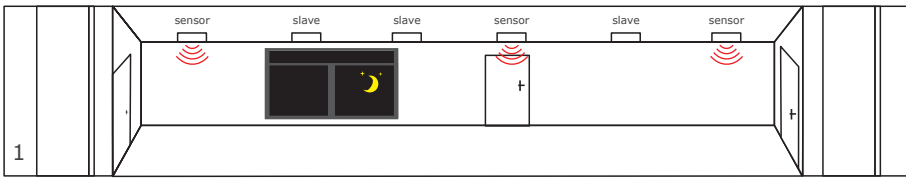


1. No motion detected, all lamps switch off.

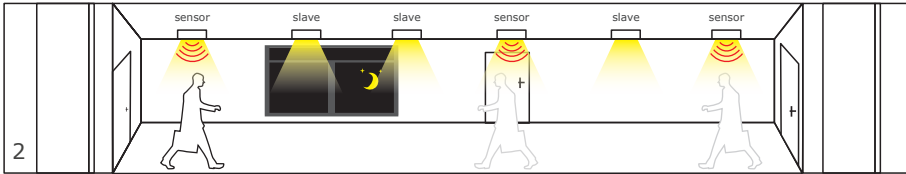

2. Any movement is detected from any direction, all lamps synchronously switch on.

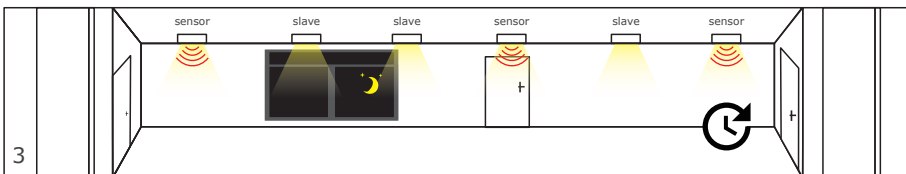

3. No motion is detected in detection area, all lamps synchronously dim to a low light level after hold time.

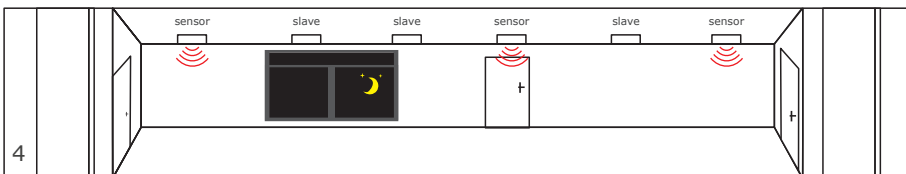

4. After stand-by period, the lamps switch off if no movement is detected in the detection zone.

TYPE:

PROJECT:

CATALOG#:

# Microwave Dimming Sensor

## Wiring Scheme

