



GI-HRL High Bay Linear Aisle Light

Type: _____
Project: _____
Catalog#: _____


Main Features

- Designed for lighting between aisles in warehouses
- Consistent light uniformity
- Multiple beam angle options
- Multiple units can be joined together
- Suspension or surface mount
- Low maintenance




Technical Information


GI-HRL

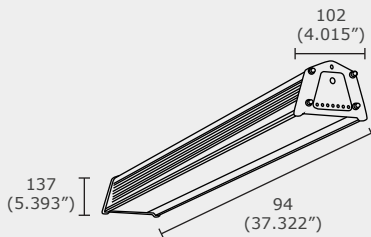

GI-120HRL

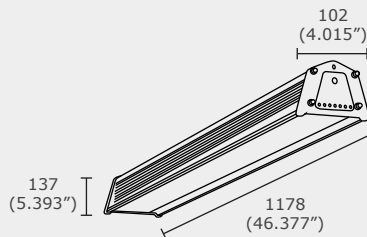

GI-150HRL

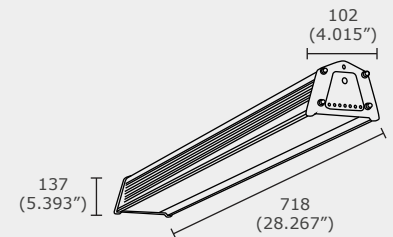

GI-180HRL

*All units in mm

Specification Features

Model	GI-120HRL	GI-150HRL	GI-180HRL
Lumen Output	13200 lm	16500 lm	19500 lm
Power Consumption (W)	110 W	150 W	180 W
Efficacy	120 lm/W	110 lm/W	111 lm/W
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Colour Temperature (CCT)	4000K, 5000K	4000K, 5000K	4000K, 5000K
CRI	Ra 80	Ra 80	Ra 80
Dimensions	948 x 137 x 102 mm	1178 x 137 x 102 mm	718 x 137 x 102 mm
Beam Angle	30° x 70°, 60° x 90°, 120°	30° x 70°, 60° x 90°, 120°	30° x 70°, 60° x 90°, 120°
IP Rating	65	65	65
LED Quantity	28	28	28
Certification	cULus, CE, RoHS, DLC	cULus, CE, RoHS, DLC	cULus, CE, RoHS, DLC
Warranty	5 Years	5 Years	5 Years

Order form

Series		Model		Wattage				Colour Temperature		Beam Angle				Beam Angle			
GD	GD	HRL	HRL	120	120 W	180	180 W	40	4000K	SM	30° x 70°	PM	120°	1D	1-10V Dimming	DF	Step Dimming Sensor
				150	150 W			50	5000K	HM	60° x 90°			OS	Occupancy Sensor	RF	Surface Mounting Bracket