



GS-50NFX1 LED Strip Lights

Type: _____
 Project: _____
 Catalog#: _____




Main Features

- Low voltage & high brightness
- Slim profile
- Comes in 5 meter rolls
- Can be cut into smaller units
- Dimmable with a driver
- 3M double sided adhesive tape
- 2-step MacAdam binning


Technical Information

GS-50NFX1

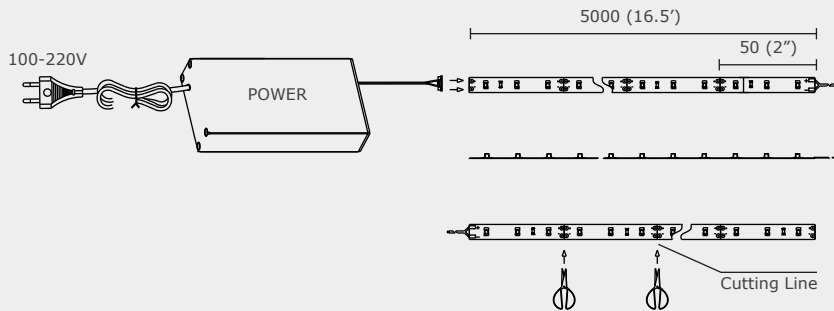

*All units in mm

Connection Type

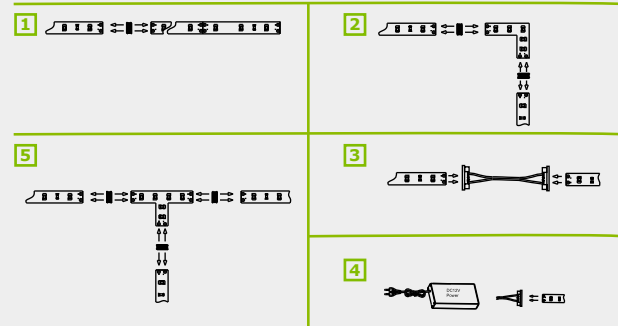

Specification Features

Model	GS-50NFX1
Lumen Output	2160 lm per roll
Power Consumption (W)	24 W
Efficacy	90
Input Voltage	24V DC
Colour Temperature	2700K, 3000K, 3500K, 4000K, 5000K, Red, Green, Blue, RGB
CRI	80
PFC	> 0.90
Dimensions	5000 x 8 x 3.2 mm
Weight (kg)	0.4 kg
IP Rating	20
Beam Angle	120°
Certification	cULus, CE, RoHS
LED Quantity	300
Warranty	5 Years

Order form

Series	Model	Length	Voltage	Colour Temperature													
GS	GS	NFX1	NFX1	50	50 (5m)	A	24V DC	27	2700K	35	3500K	50	5000K	G	Green	RGB	RGB
								30	3000K	40	4000K	R	Red	B	Blue		



Accessories

Driver (Non-Dim)				Driver (Dimmable)			
48	*48 W	100	100 W	40	40 W	96	96 W
60	60 W	150	150 W	60	60 W	150	150 W
* AC/DC Adaptor							