



# GS-50NFX3 LED Strip Lights

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_




## Main Features

- Low voltage & high brightness
- Slim profile
- Comes in 5 meter rolls
- Can be cut into smaller units
- Dimmable with a driver
- 3M double sided adhesive tape
- 2-step MacAdam binning


## Technical Information

### GS-50NFX3

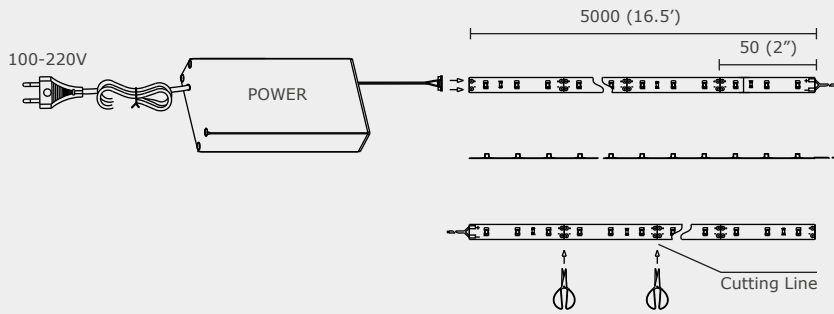

\*All units in mm

### Connection Type

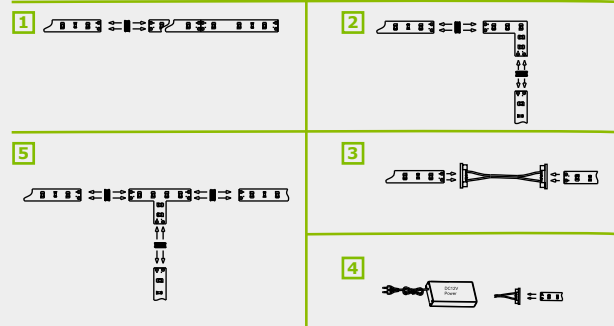

## Specification Features

Model	GS-50NFX3	GS-50NFX3D
Lumen Output	2160 lm per roll	4320 lm per roll
Power Consumption (W)	24 W	48 W
Efficacy	90	90
Input Voltage	24V DC	24V DC
Colour Temperature	2700K, 3000K, 3500K, 4000K, 5000K, Red, Green, Blue, RGB	2700K, 3000K, 3500K, 4000K, 5000K, Red, Green, Blue, RGB
CRI	80	80
PFC	> 0.90	> 0.90
Dimensions	5000 x 10 x 3.2 mm	5000 x 10 x 3.2 mm
Weight (kg)	0.4 kg	0.4 kg
IP Rating	65, 68	65, 68
Beam Angle	120°	120°
Certification	cULus, CE, RoHS	cULus, CE, RoHS
LED Quantity	300	600
Warranty	5 Years	5 Years

## Order form

Series	Model	Length	Voltage	Colour Temperature	IP
GS	GS NFX3 NFX3D	50 50 (5m)	A 24V DC	27 2700K 35 3500K 50 5000K 30 3000K 40 4000K R Red B Blue	G Green RGB RGB 65 65 68 68