

Type: _____
 Project: _____
 Catalog#: _____

Main Features


- Lighting up building walls and objects
- Fully waterproof for outdoor use
- Programmable lighting effects such as chases, chase patterns and directions
- Single colour or full RGB options
- Compatible with all DMX 512 controllers
- 50,000+ hours of life



Technical Information

GW-WA-A Series

- GW-12WA-A** L = 440 mm
- GW-18WA-A** L = 580 mm
- GW-24WA-A** L = 840 mm
- GW-36WA-A** L = 1000 mm

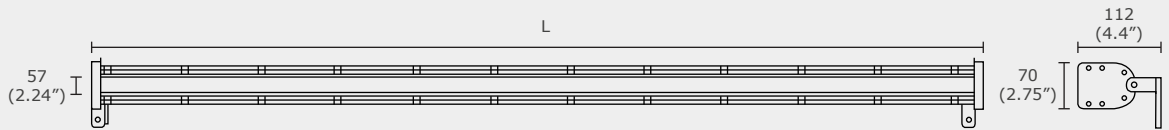

*All units in mm

Specification Features

Model	GW-12WA-A	GW-18WA-A	GW-24WA-A	GW-36WA-A
Lumen Output	816 lm	1050 lm	1100 lm	1500 lm
Power Consumption (W)	14 W	21 W	28 W	45 W
Colour Temperature	3000K, 4000K, 5000K, Red, Green, Blue, RGB	3000K, 4000K, 5000K, Red, Green, Blue, RGB	3000K, 4000K, 5000K, Red, Green, Blue, RGB	3000K, 4000K, 5000K, Red, Green, Blue, RGB
CRI	80	80	80	80
Input Voltage	100-240V AC	100-240V AC	100-240V AC	100-240V AC
Weight (kg)	1.8 kg	2 kg	2.5 kg	4 kg
Beam Angle	15°, 30°, 60°	15°, 30°, 60°	15°, 30°, 60°	15°, 30°, 60°
IP Rating	65	65	65	65
Dimensions	440 x 70 x 112 mm	580 x 70 x 112 mm	840 x 70 x 112 mm	1000 x 70 x 112 mm
Certification	cETLus, RoHS, CE	cETLus, RoHS, CE	cETLus, RoHS, CE	cETLus, RoHS, CE
Warranty	5 Years	5 Years	5 Years	5 Years

Order form

Series	Model	LEDs/ Length				Wattage				Voltage		Colour Temperature				Beam Angle							
GW	GW	WA-A	WA-A	12	12 (440 mm)	24	24 (840 mm)	14	14 W	28	28 W	A	100-240V AC	30	3000K	50	5000K	G	Green	15	15°	60	60°
				18	18 (580 mm)	36	36 (1000 mm)	21	21 W	45	45 W			40	4000K	R	Red	B	Blue	30	30°		

* Each Length has fixed, corresponding wattage