



# GD-SFX Stream Flow Linear Light

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_


## Main Features

- Comes in four lengths - 2, 3, 4 and 8 feet
- Equipped with a frosted lens
- Universal input voltage of 120-277V or 347V
- Pendant, surface and row mounting
- Long lifetime of about 11 years or 50,000 hours



## Technical Information

### GD-SFX

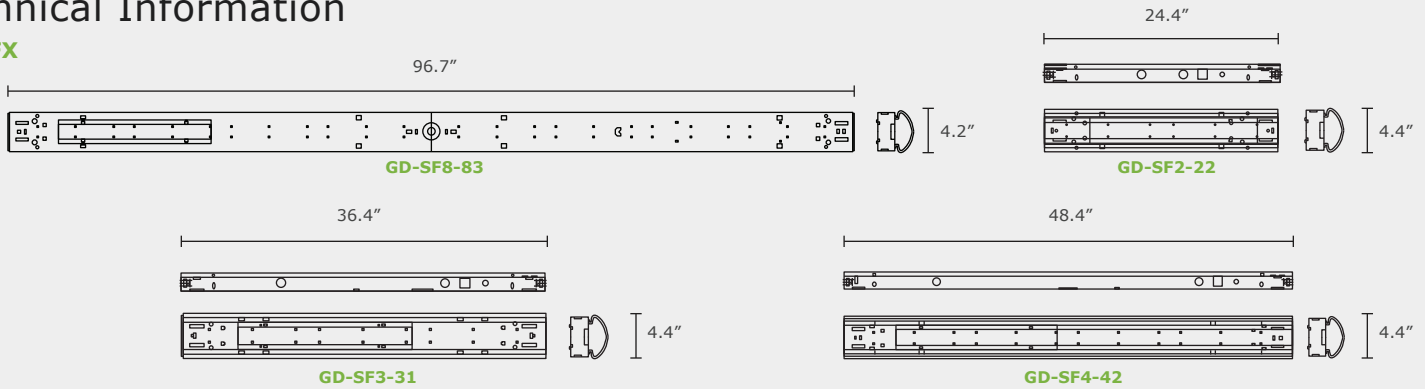

\*All units in inches

## Specification Features

Model	GD-SF2-22	GD-SF3-31	GD-SF4-42	GD-SF8-83
Lumen Output	2200 lm	3300 lm	4400 lm	8800 lm
Power Consumption (W)	22 W	31 W	42 W	83 W
Efficacy	100 lm/W	106.5 lm/W	104.7 lm/W	106 lm/W
Input Voltage	120-277V AC, 347V AC	120-277V AC, 347V AC	120-277V AC, 347V AC	120-277V AC, 347V AC
Colour Temperature (CCT)	3500K, 4000K	3500K, 4000K	3500K, 4000K	3500K, 4000K
CRI	Ra 80	Ra 80	Ra 80	Ra 80
Dimensions	24.4 x 4.4 x 3.5 inches	36 x 4.4 x 3.5 inches	48 x 4.4 x 3.5 inches	96 x 4.4 x 3.5 inches
Weight	2.33 kg	3.53 kg	3.99 kg	6.37 kg
IP Rating	44	44	44	44
Certification	cULus, RoHS, CE	cULus, RoHS, CE	cULus, RoHS, CE	cULus, RoHS, CE
Warranty	5 Years	5 Years	5 Years	5 Years

## Order form

Series		Model		Trim				Colour Temperature		Voltage		Mounting				Options	
GD	GD	SF	SF	22	22 W	42	42 W	35	3500K	A	120-277V AC	WM	Wall Mount	PM	Pendant Mount	OS	Occupancy Sensor
				31	31 W	83	83 W	40	4000K	B	347V AC	HN	Hook Mount			BL	Bi-Level Dimming