



Type: _____
 Project: _____
 Catalog#: _____




Main Features

- Round aluminum housing with optimal cooling
- Microprismatic cover for eye comfort
- RGBW function for decorative up light
- 4 different mounting options available

Technical Information

GN-FL-600

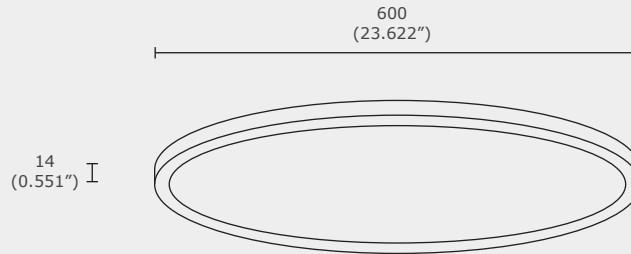

*All units in mm

Specification Features

Model	GN-FL-600-40	GN-FL-450-26
Lumen Output	4900 lm	6000 lm
Power Consumption (W)	40 W	50 W
Efficacy	122 lm/W	120 lm/W
Input Voltage	120-277V AC	120-277V AC
Colour Temperature (CCT)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
CRI	Ra 80	Ra 80
Beam Angle	90°	90°
Certification	cETLus, CE, CB	cETLus, CE, CB
Warranty	5 Years	5 Years

Order form

Series		Model		Size		Colour Temperature				Housing		Dimming		Accessories					
GN	GN	FL	FL	600	600	40	40 W	30	3000K	40	4000K	BL	Black	ND	Non-Dimming	CS	Cable Suspension	SM	Surface Mount
						50	50 W	35	3500K			WH	White	TR	TRIAC	RS	Rod Suspension	RC	Recessed