



E-60L Dimmable Class 2 LED Driver

Type: _____
 Project: _____
 Catalog#: _____




Main Features

- Dimmable with standart MLVTRIAC dimmer
- Dual protection - primary and secondary auto-reset circuit breakers
- Nema 3R Enclosure - Outdoor use
- Dim down to 1%
- Class 2
- UL 8750
- Certified to CSA Standard



Technical Information

E60L

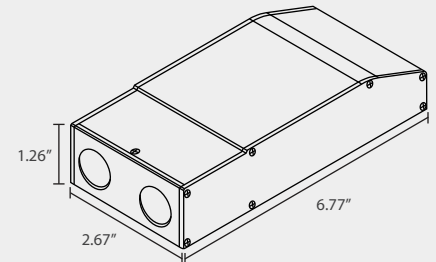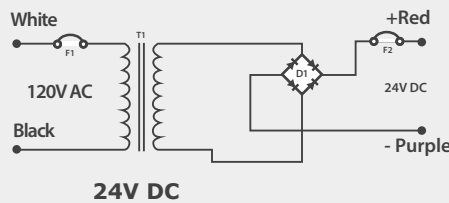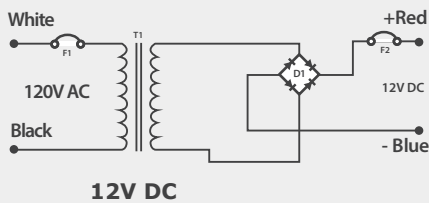

*All units in Imperial

Specification Features

Model	E60L
Max Load	60W
Input Voltage	120V AC
Input Current at Max Load	0.61 A
Output Voltage	12V DC; 24V DC
Output Current at Max Load	5 A (12V DC); 2.63 A (24V DC)
Power Factor	0.95
Efficiency	> 90%
Operating Temperature	-30°C ~ 50°C
Minimum Dimming Level	1%
Short Circuit Protection	Yes
Overcurrent	Yes
Over Temperature	Yes
Open Circuit Protection	Yes
Dimensions	6.77 in x 2.677 in x 1.26 in
Weight	17 Oz

Order form

Series	Model	Wattage
E	E 60L 60L A	12V DC B 24V DC

— Output Voltage vs. Load
 — Output Voltage With a Typical Dimmer

