



# GN-PS2-1201 Rectangular Panel Light

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_




## Main Features

- Suitable for damp location and IC rated
- T-Bar or suspension mount
- Over 50,000 hours of life
- Anti-glare and vandal resistant
- Tunable white option
- Selectable colour temperature
- 0-10V dimming function
- Weighs roughly 7.2kg

## Technical Information

### GN-PS2-1201

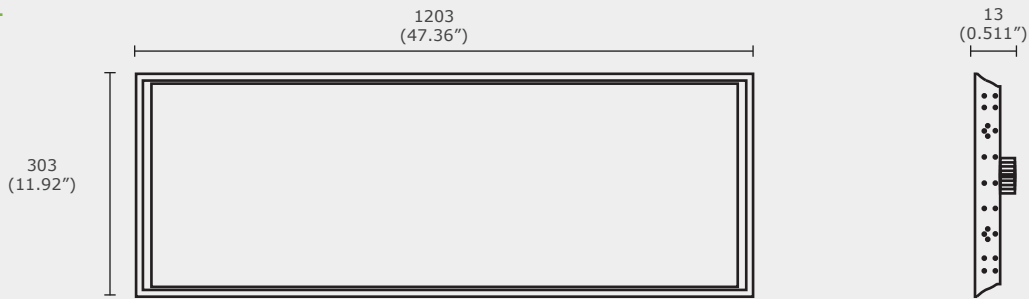

\*All units in mm

## Specification Features

Model	GN-30PS2-1201	GN-40PS2-1201
Lumen Output	3600 lm	4800 lm
Power Consumption (W)	30 W	40 W
Efficacy	120 lm/W	120 lm/W
Input Voltage	120-277V AC, 347V AC	120-277V AC, 347V AC
Colour Temperature (CCT)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
CRI	Ra 80, Ra 90	Ra 80, Ra 90
IP Rating	42	42
Beam Angle	120°	120°
Dimensions	303 x 1203 x 13 mm	303 x 1203 x 13 mm
Certification	cETLus, RoHS, CE, DLC	cETLus, RoHS, CE, DLC
Warranty	5 Years	5 Years

## Order form

Series	Wattage	Model	SIZE	Voltage	CRI	Colour Temperature	Options	Dimming
GN	GN 30 30 W 40 40 W	PS2 PS2	1201 1201 (1' x 4')	A 120-277V AC B 347V AC	80 Ra 80 90 Ra 90	30 3000K 35 3500K 40 4000K	T Tunable White (3000K-5000K) SM Surface Mounting SP Suspension Mounting MS Motion Sensor	DL DALI