



GG-09LPWL7 LED Recessed Wall Light

Type: _____
Project: _____
Catalog#: _____


Main Features

- Die cast aluminum housing
- Stainless steel plate
- Perfect for pathways or stairs
- Over 50,000 hours of life



Technical Information

GG-09LPWL7

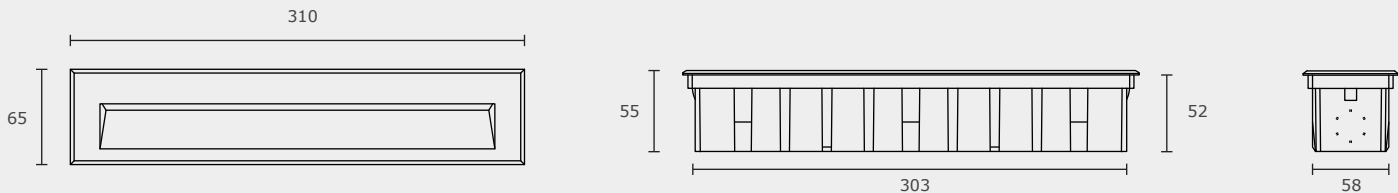

Mounting Sleeve

*All units in metric

Specification Features

Model	GG-09LPWL7
Lumen Output	290 lm
Power Consumption (W)	9 W
Colour Temperature	2000K, 3000K, 6000K
Input Voltage	24V DC
CRI	Ra 80
IP Rating	65
Beam Angle	120°
Dimensions	310 x 65 x 58 mm
Operating Temperature	-20°C ~ 40°C
Certification	cETLus, RoHS, CE
Warranty	5 Years

Order form

Series	Model	Wattage	Voltage	Colour Temperature	Dimming Options	Front Cover
GG	GG LPWL7 LPWL7	09 9 W	A 24V DC	20 2000K 30 3000K 60 6000K	DM 1-10V DL DALI TRC TRC PWM PWM	DG Dark Grey SV Silver Grey BK *Black

*Standard Option