



GG-03IGRD/IGSQ Inground Light

Type: _____
 Project: _____
 Catalog#: _____




Main Features

- Die-cast aluminum housing
- Perfect for pathways, walls or stairs
- Loading capacity of 1330kg
- Steel plate & step tempered glass



Technical Information

GG-03IGRD/IGSQ

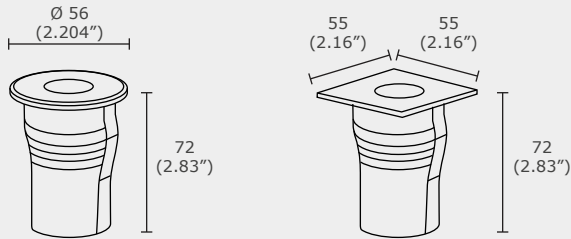

A is the protective cover in the site

*All units in mm

Specification Features

Model	GG-03IGRD/IGSQ
Lumen Output	66 lm, 77 lm
Power Consumption (W)	3 W
Input Voltage	24VDC, 120V AC
Colour Temperature	3000K, 4000K, Red, Green, Blue, RGB
Dimensions	Circular: Ø 56 x 72mm, Square: 55 x 72 mm
IP Rating	67
Beam Angle	25°, Asymmetrical 50°
Weight	4 kg
PFC	0.90
Certification	cETLus, CE, RoHS
Warranty	5 Years

Order form

Series		Model		Wattage		Voltage		Colour Temperature				Lens			
GG	GG	IGRD	IGRD (Circular)	03	03 W	A	24V DC	30	3000K	R	Red	B	Blue	25	25°
		IGSQ	IGSQ (Square)			B	120V AC	40	4000K	G	Green	RGB	RGB	30	50° (Asymmetrical)