

TYPE:

PROJECT:

CATALOG#:



Product Features


The GP-ASQ4NC is a downlight with die cast aluminum housing, and an adjustable lamp height. The reflector and dimmable are seperable for your convienence and offers adjustable hanger bar installation.

Product Specifications

Model	GP-15ASQ4NC	GP-20ASQ4NC	GP-30ASQ4NC
Lumen Output	1000 lm	1500 lm	2250 lm
Power Consumption (W)	15 W	20 W	30 W
Input Voltage	120-277V AC		
Colour Temperature (CCT)	2700K, 3000K, 3500K, 4000K		
CRI	Ra 80, Ra90		
Dimensions	381 x 381 mm		
PPF	> 0.98		
IP Rating	IP65		

IP65 IESNA LM-80 IESNA LM-79 DIMMABLE 5 YEARS LIMITED WARRANTY INCLUDED

Technical Drawing

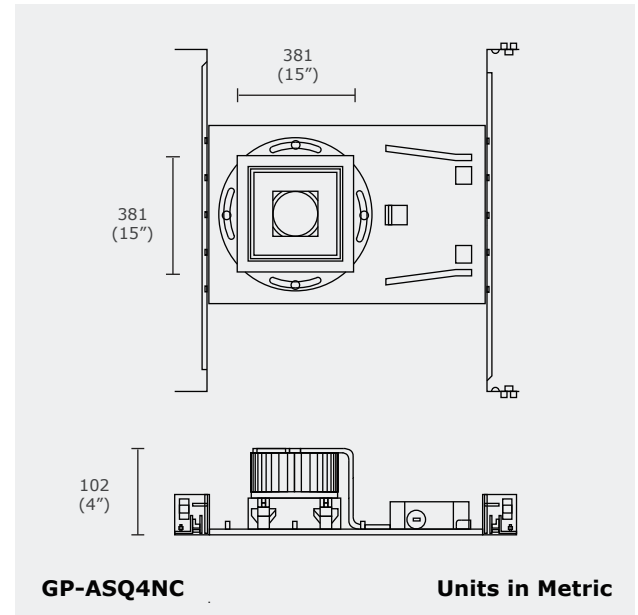

Order Form

GP	-	-	-	-	-	-	-
Series	Model	3	4	5	6	7	
2. MODEL	3. WATTAGE	4. VOLTAGE	5. CCT	6. CRI	7. TRIM		
ASQ4NC ASQ4NC	15 15 W 30 30 W 20 20 W	A 120-277V AC	27 2700K 35 3500K 30 3000K 40 4000K	80 Ra 80 90 Ra 90	T Trim TL Trimless		