

TYPE:

PROJECT:

CATALOG#:


LED STRIP LIGHT



Product Features


The WFX flexible strip light is a low voltage and high brightness slim profile ideal for a multitude of applications. Available in 5 meters rolls, can also be cut to specific length and includes pre-applied double-sided adhesive for easy installation. Our LED strip lights come in a wide range of single colors as well as multi-color strips (RGB).

Technical Drawing

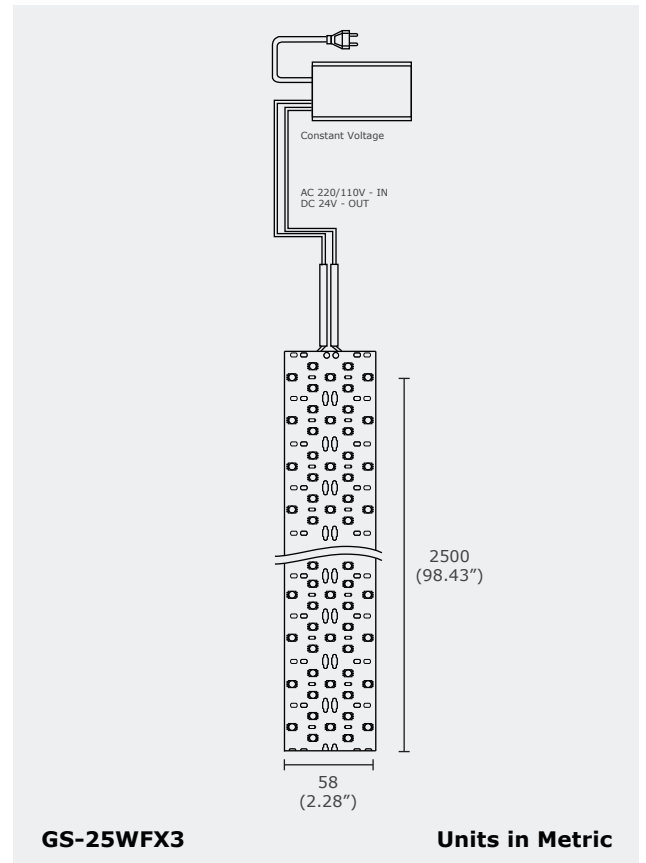

Product Specifications

Model	GS-25WFX3
Lumen Output	7380 lm per roll
LED Quantity	700
Power Consumption (W)	82 W
Efficacy	90 lm/W
Input Voltage	12V DC, 24V DC
Colour Temperature (CCT)	3000K, 4000K, 5000K
Dimensions	2500 x 58 x 3.2 mm
CRI	Ra80
IP Rating	IP20
Beam Angle	120°



Order Form

GS	-	WFX3	-	3	-	4	-	5	-	6
Series		Model								
3. LENGTH	4. VOLTAGE	5. CRI	6. Colour Temperature							
25 2500 (2.5m)	A 12V DC B 24V DC	80 Ra80	30 3000K 40 4000K 50 5000K							

Hardwire Power Supplies and Accessories

Part Name	Description
DR-CV-12W	12W Triac Dimming driver
DR-CV-20W	20W Triac Dimming driver
DR-CV-30W	30W Triac Dimming driver
DR-CV-40W	40W Triac Dimming driver
DR-CV-60W	60W Triac Dimming driver
DR-CV-80W	80W Triac Dimming driver
E40L	40W Triac Dimming driver
E60L	60W Triac Dimming driver
E96L	100W Triac Dimming driver
M150L	150W Triac Dimming driver
M200L	200W Triac Dimming driver
M300L	300W Triac Dimming driver



Dimmable Power Supply (DR-CV-XXW)



Dimmable Power Supply (M_XX)



Dimmable Power Supply (E_XXL)

Dimmable Drivers

Please see our driver catalog for more options.


Catalog




|TYPE: _____ |PROJECT: _____ |CATALOG#: _____ **LED STRIP LIGHT**

Quick Connectors

Part Name	Description
GS-ID-C3	Strip to Power Connector. Available in static colour and RGB
GS-ID-C1	Strip to Power 3" Connector. Available in static colour and RGB
GS-ID-C5	Strip to strip Coupler. Available in static colour and RGB
GS-L001	L Connector. Available in static colour and RGB
GS-T003	T Connector. Available in static colour and RGB
GS-ID-C4	+ Connector




Strip to Power Connector




Strip to Strip Connector




Static - 2 Wires




RGB - 4 Wires



L Connector



T Connector



+ Connector

TYPE:

PROJECT:

CATALOG#:

LED STRIP LIGHT

Controllers

Part Name	Description
GC-2820WRGB	Wall mount RGB Controller. Touch screen RGB controller
GS-2822WCCT	Wall mount CCT Controller. Touch screen CCT controller
GC-2102DMX	DMX512 Decoder provides an addressable DMX signal to be used within a DMX controlled system
GX-2818RF	RGB wireless Controller. 10 preset modes
GC-1009-4V1	RGB wireless Decoder. Synchronization of multiple runs from one controller



Wall mount RGB Controller



DMX512 Decoder



RGB wireless Decoder