

TYPE: _____ PROJECT: _____ CATALOG#: _____

Product Features


- Extruded aluminum alloy & powder coated
- Anti-glare
- Optical reflector with over 85% of efficiency



Product Specifications

Model	GH-5DM
Lumen Output	550 lm
Power Consumption (W)	9 W
Efficacy	61 lm/W
Input Voltage	24V DC
Colour Temperature (CCT)	3000K, 3500K, 4000K
Beam Angle	120°
CRI	Ra80
IP Rating	IP65
Dimensions	Ø 120 x 64 mm

Product Specifications

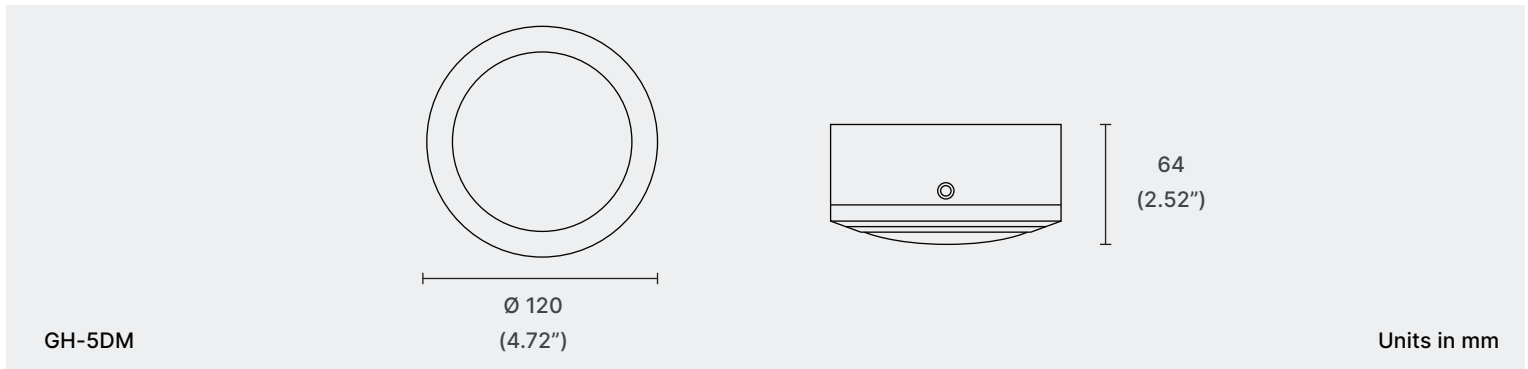




Order Form

GH _____ 5DM _____
 Series Model 3 4 5 6

3. WATTAGE	4. VOLTAGE	5. CCT	6. BEAM ANGLE
9 9 W	A 24V DC	30 3000K 40 4000K 35 3500K	120 120°

TYPE: _____ PROJECT: _____ CATALOG#: _____ LED CEILING DOWNLIGHT

Photometric

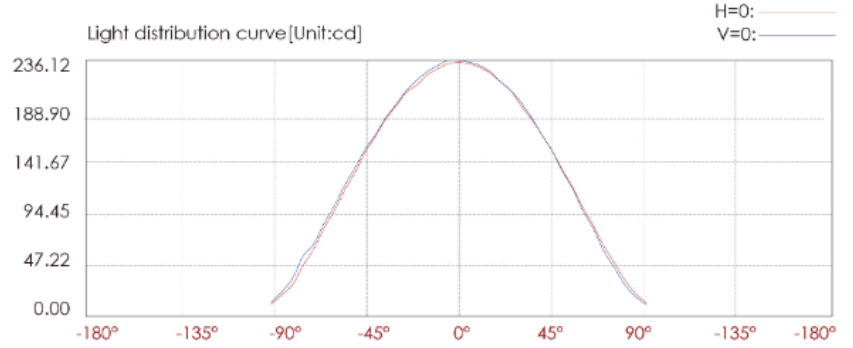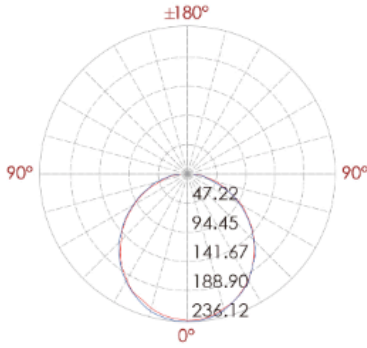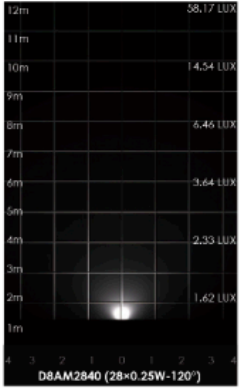

Lux distance cure

	Illuminance at a distance		Beam width	
	Center beam LUX		V	H
2m	58.17 LUX		5.6m	5.7m
4m	14.54 LUX		11.2m	11.4m
6m	6.46 LUX		16.9m	17.1m
8m	3.64 LUX		22.5m	22.8m
10m	2.33 LUX		28.1m	28.5m
12m	1.62 LUX		33.7m	34.2m
Ver.Spread:109.2		Horiz.Spread:110.0		