



TYPE: _____ PROJECT: _____ CATALOG#: _____ LED PARKING/GARAGE HIGHBAY LIGHT

Product Features

- Eco-friendly without mercury, No UV or IR in the beam
- No flickering, no humming
- Easy to install and operate while saving energy with long lifespan
- Widely used in gas station, service station, parking lot and warehouse




DIMMABLE   IESNA LM-79 IESNA LM-80 5 YEARS LIMITED WARRANTY INCLUDED IP65

Product Specifications

Model	GI-PG07-60	GI-PG07-75	GI-PG07-90
Lumen Output	7,800 lm	9,300 lm	11,520 lm
Power Consumption (W)	60 W	75 W	90 W
Efficacy	130 lm/W	124 lm/W	128 lm/W
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Colour Temperature (CCT)	CCT Tunable (3500K, 4000K, 5000K)	CCT Tunable (3500K, 4000K, 5000K)	CCT Tunable (3500K, 4000K, 5000K)
Beam Angle	190°	190°	190°
CRI	Ra80	Ra80	Ra80
IP Rating	IP65	IP65	IP65
PFC	>0.9	>0.9	>0.9
Dimensions	243 x 243 x 92 mm	243 x 243 x 92 mm	243 x 243 x 92 mm

Technical Drawing

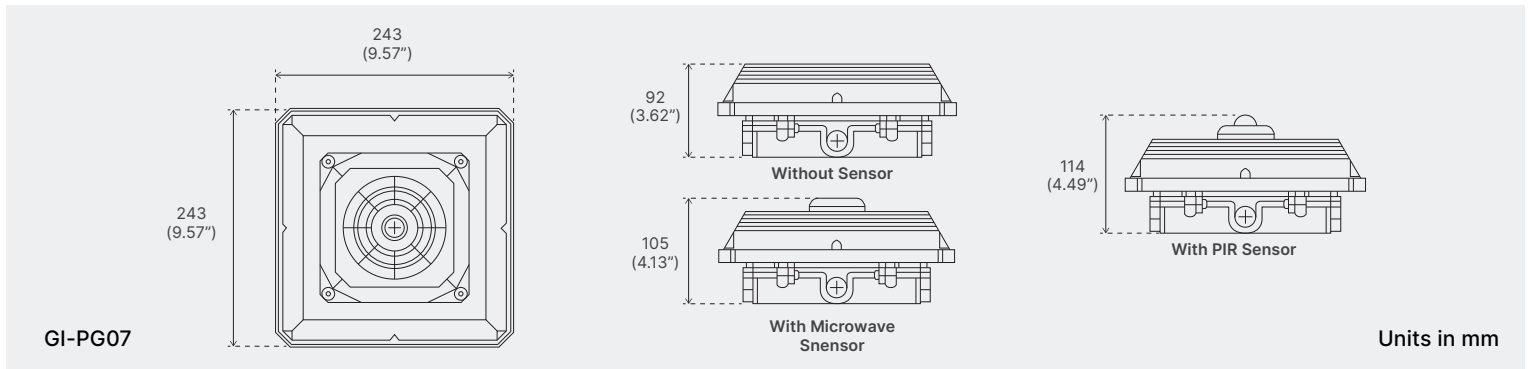

Order Form

GI	PG07	3	4	5	6	7	8	9	
Series	Model								
3. WATTAGE	4. VOLTAGE	5. CRI	6. CCT	7. BEAM ANGLE	8. HOUSING	9. SENSOR			
60 60 W 75 75 W 90 90 W	A 120-277V AC	80 Ra80	CCT Tunable	190 190°	WH White — Custom	MS Motion Sensor PIR PIR Sensor			

TYPE:


PROJECT:

CATALOG#:

LED PARKING/GARAGE HIGHBAY LIGHT

Photometric

Luminous Intensity Distribution Curve

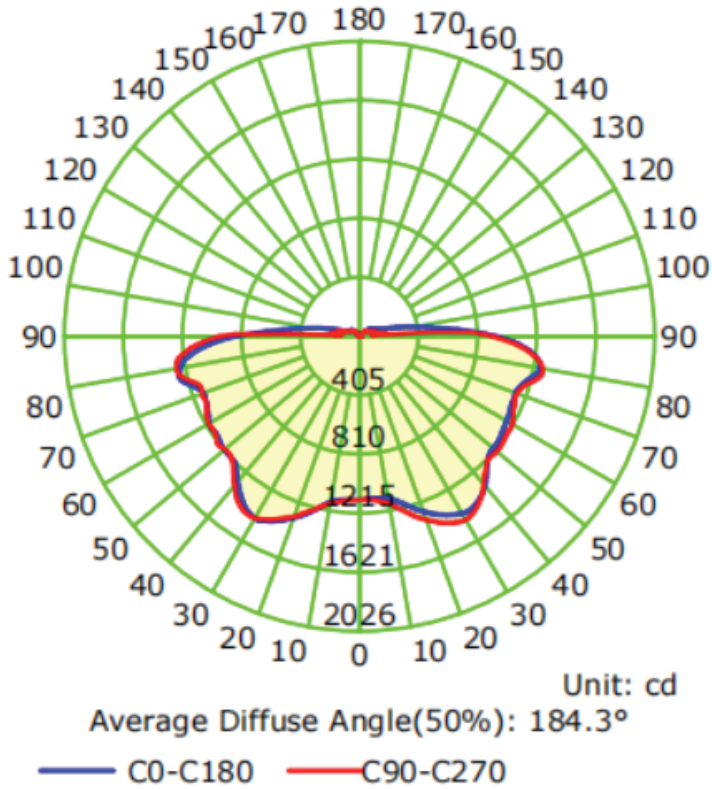

The Average Illuminance Effective Figure

