



# GS-50XID LED Strip Lights

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_




## Main Features

- Low voltage - high brightness
- Comes in 5 meter rolls
- Can be cut into smaller units
- Slim profile makes it applicable for cove lighting or back lighting
- Dimmable with a driver
- Comes with 3M double sided adhesive tape
- 3-step MacAdam dimming


## Technical Information

### GS-50XID

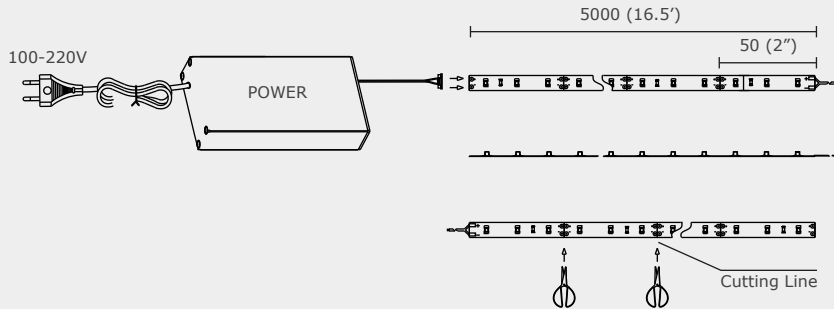

\*All units in mm

## Connection Type

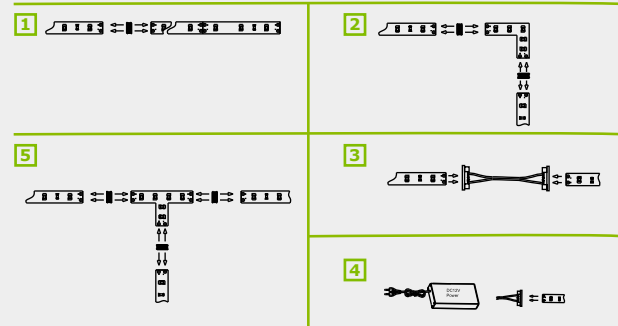

## Specification Features

Model	GS-50XID	GS-50XID2
Lumen Output	8640 lm per roll	8640 lm per roll
Power Consumption (W)	96 W	96 W
Efficacy	90	90
Input Voltage	24V DC	24V DC
Colour Temperature	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K
CRI	80	80
PFC	> 0.90	> 0.90
Dimensions	5000 x 15 x 3.2 mm	5000 x 17 x 3.2 mm
Weight (kg)	0.4 kg	0.4 kg
IP Rating	20	65
Beam Angle	120°	120°
Certification	cULus, CE, RoHS	cULus, CE, RoHS
LED Quantity	600	600
Warranty	5 Years	5 Years

## Order form

Series		Model		Length	Voltage	Colour Temperature				Driver (Non-Dim)				Driver (Dimmable)					
GS	GS	XID	XID	50	50 (5m)	A	24V DC	30	3000K	40	4000K	48	*48 W	100	100 W	40	40 W	96	96 W
		XID2	XID2					35	3500K	50	5000K	60	60 W	150	150 W	60	60 W	150	150 W

\* AC/DC Adaptor