GS-SlimR
Ultra-thin Rigid Strip Light

Type: _____

Project: _____

Catalog#: _____

Main Features

- Perfect for interior decorative lighting applications
- Touch dimming of 100%, 50%, 25%, 0%
- Available in 4 different lengths

Technical Information

GS-SlimR

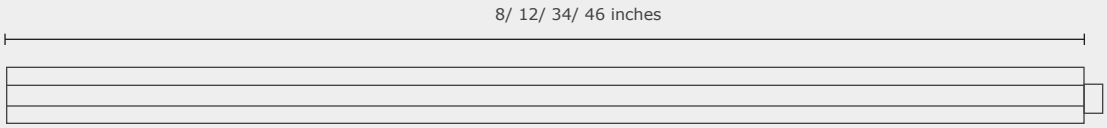

*All units in inch

Specification Features

Model	GS-SlimR8	GS-SlimR12	GS-SlimR34	GS-SlimR46
Lumen Output	77 lm (48 lm/W)	115 lm (48 lm/W)	346 lm (48 lm/W)	466 lm (48 lm/W)
Power Consumption (W)	1.6 W	2.4 W	7.2 W	9.7 W
Colour Temperature	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K
Input Voltage	12V DC	12V DC	12V DC	12V DC
PFC	> 0.90	> 0.90	> 0.90	> 0.90
Dimensions	8” x 7/17” x 3/8”	12” x 7/17” x 3/8”	34” x 7/17” x 3/8”	46” x 7/17” x 3/8”
Beam Angle	50°	50°	50°	50°
IP Rating	40	40	40	40
Certification	cULus	cULus	cULus	cULus
Warranty	5 Years	5 Years	5 Years	5 Years

Order form

Series		Model				Voltage		Colour Temperature			
GS	GS	**SR8**	SR8	**SR34**	SR34	**A**	12V DC	**30**	3000K	**50**	5000K
		SR12	SR12	**SR46**	SR46			**40**	4000K		

greenimagetech.com

105-8288 N Fraser Way
Burnaby BC, V3N 0E9

T: (604) 207-9879
F: (604) 207-6992

© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.