

Type: _____
 Project: _____
 Catalog#: _____




Main Features

- WMB Series full cutoff wall pack
- Can be adjustable from 0-90 degree
- IP 65 rated for damp location, rust and corrosion proof
- 10 kv surge production optional
- Photocell, motion sensor optional
- Over 50,000 hours of life
- Beam angle (H-V) is 80° - 100°

Technical Information

GWP-WMB

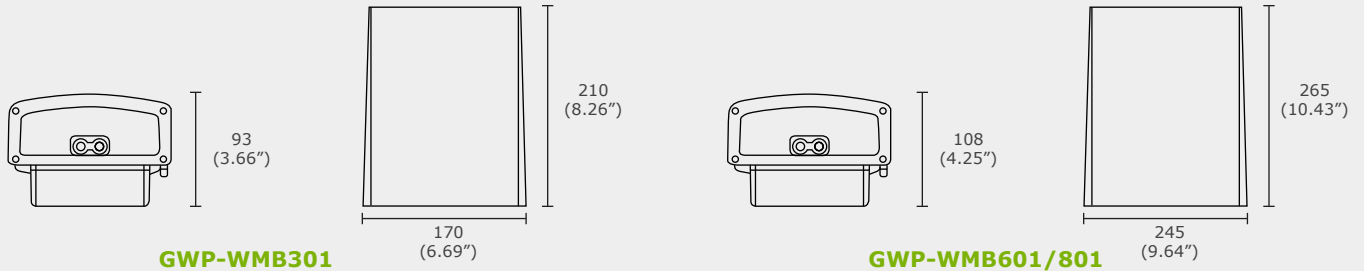

*All units in mm

Specification Features

Model	GWP-WMB301	GWP-WMB601	GWP-WMB801
Lumen Output	4200 lm	8400 lm	11200 lm
Power Consumption (W)	30 W	60 W	80 W
Efficacy	140 lm/W	140 lm/W	140 lm/W
Colour Temperature	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K
CRI	80	80	80
Input Voltage	100-277V AC, 347V AC	100-277V AC, 347V AC	100-277V AC, 347V AC
PFC	< 13.5% at full load	< 13.5% at full load	< 13.5% at full load
Weight	1.6 kg / 1.8 kg	3.5 kg / 3.7 kg	3.7 kg / 3.9 kg
Dimensions	210 x 170 x 93 mm	265 x 245 x 108 mm	265 x 245 x 108 mm
Light Distribution	80° - 100°	80° - 100°	80° - 100°
IP Rating	65	65	65
Certification	cULus, DLC	cULus, DLC	cULus, DLC
Warranty	5 Years	5 Years	5 Years

Order form

Series	Model	Wattage	Colour Temperature	Voltage	Mounting	Finish	Options
GWP	WMB301	30 30 W	30 3000K 50 5000K	A 100-277V AC	WM Wall Mount	DB Dark Bronze	PC Photocell
	WMB601	60 60 W	35 3500K	B 347V AC		BL Black	DM 0-10V Dimming
	WMB801	80 80 W	40 4000K			WH White	MS Motion Sensor