



## GX-436L Series Vapour Proof Luminaire

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_


### Main Features

- Certified for use in damp or wet locations
- Certified for areas with high concentrations of dust
- 2407 grey polycarbonate body housing and diffuser
- Non-corrosion, shockproof and heat resistance
- IP66 rated for outdoor use



### Technical Information

#### GX-436L - 40/50/60

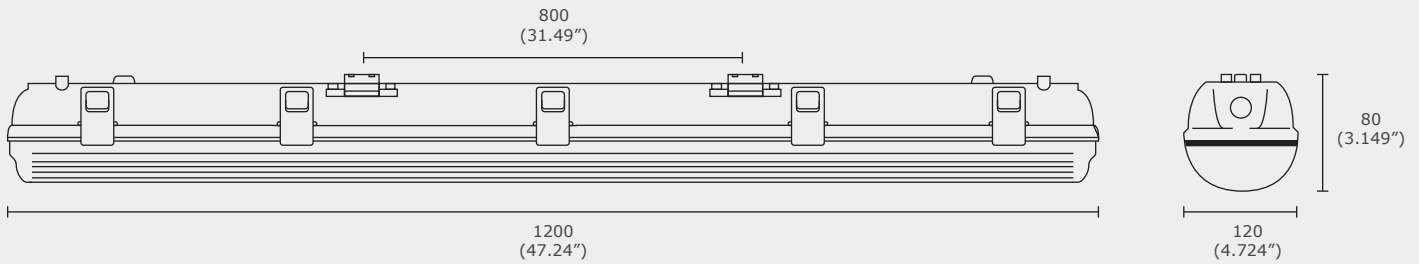

\*All units in mm

### Specification Features

Model	GX-436L-40	GX-436L-50	GX-436L-60
Lumen Output	4800 lm	5900 lm	7200 lm
Power Consumption (W)	40 W	50 W	60 W
Efficacy	120 lm/W	118 lm/W	120 lm/W
Input Voltage	120-277V AC, 347V AC, 120-347V AC	120-277V AC, 347V AC, 120-347V AC	120-277V AC, 347V AC, 120-347V AC
Colour Temperature (CCT)	3000K, 3500K, 4000K	3000K, 3500K, 4000K	3000K, 3500K, 4000K
PFC	> 0.901	> 0.901	> 0.901
Weight	3 kg	3 kg	3 kg
Dimensions	1200 x 120 x 80 mm	1200 x 120 x 80 mm	1200 x 120 x 80 mm
IP Rating	66	66	66
Certification	cULus, RoHS, CE, DLC	cULus, RoHS, CE, DLC	cULus, RoHS, CE, DLC
Warranty	5 Years	5 Years	5 Years

### Order form

Series		Model		Wattage		Colour Temperature		Voltage		Optional Accessories			
GX	GX	436L	436L (8ft)	40	40 W	30	3000K	A	100-277V AC	SSC	Stainless Steel Clips	EB	Emergency Backup
				50	50 W	40	4000K	B	347V AC	OS	Occupancy Sensor	BI	Bi-Level Dimming
				60	60 W	50	5000K	C	120-347V AC	FM	0-10V Dimming		