



GG-06LPWL6 LED Recessed Wall Light

Type: _____
Project: _____
Catalog#: _____



Main Features

- Die cast aluminum housing
- Stainless steel plate
- Perfect for pathways or stairs
- Over 50,000 hours of life



Technical Information

GG-06LPWL6

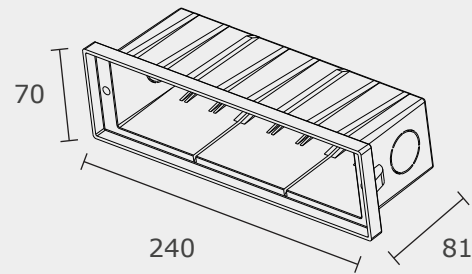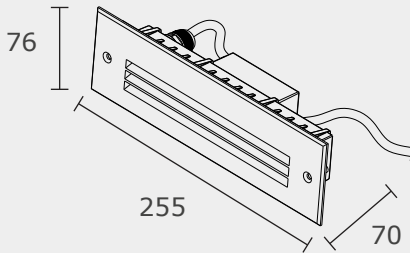

Mounting Sleeve

*All units in metric

Specification Features

Model	GG-06LPWL6
Lumen Output	45 lm
Power Consumption (W)	6 W
Colour Temperature	2000K, 3000K, 6000K
Input Voltage	24V DC
CRI	Ra 80
IP Rating	66
Dimensions	255 x 70 x 81 mm
Operating Temperature	-20°C ~ 40°C
Certification	cETLus, RoHS, CE
Warranty	5 Years

Order form

Series	Model	Wattage	Voltage	Colour Temperature		Dimming Options				Front Cover				
GG	GG LPWL6 LPWL6	06 6 W	A 24V DC	20 30	2000K 3000K	60 6000K	DM DL	1-10V DALI	TRC PWM	TRIAC PWM	DG SV	Dark Grey Silver Grey	BK	*Black
*Standard Option														