

TYPE:

PROJECT:

CATALOG#:

SURFACE MOUNT FIXTURE



Product Features

GD-UTC is a surface mount fixture with sleek and slender design. Available in aluminium or anodized black colour

Product Specifications

Model	GD-UTC5	GD-UTC7	GD-UTC9	GD-UTC11
Lumen Output	1125 lm	1350 lm	1620 lm	1800 lm
Power Consumption (W)	12.5 W	15 W	18 W	20 W
Input Voltage	120-277V AC			
Colour Temperature (CCT)	3000K, 3500K, 4000K			
CRI	Ra 90			
Dimensions	Ø 5"x 0.75"	Ø 7"x 0.75"	Ø 9"x 0.75"	Ø 11"x 0.75"
Beam Angle	CE, cETLus			
IP Rating	IP20			




IESNA LM-80

IESNA LM-79

IP20 RATED & TESTED

5 YEARS LIMITED WARRANTY INCLUDED

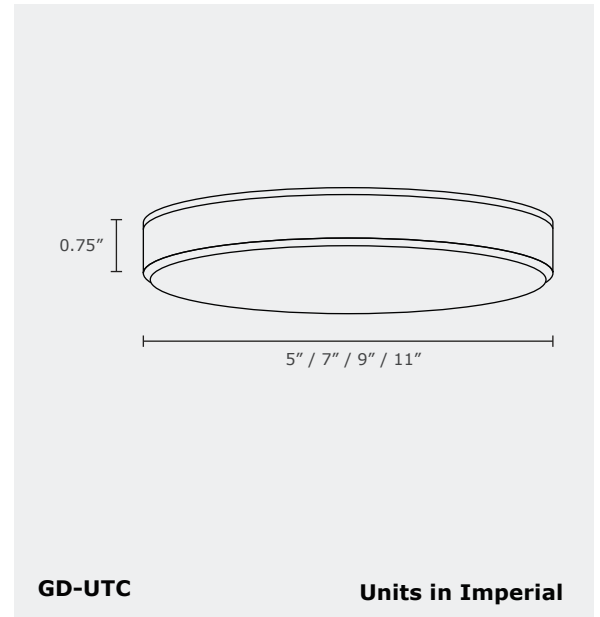

GD-UTC

Units in Imperial

Order Form

GD		-		-		-		-		-		-		-	
Series		Model		3		4		5		6		7			
2. MODEL	UTC	3. SIZE	5 Ø 5" 9 Ø 9"	4. VOLTAGE	A 120-277V AC	5. CCT	30 3000K 40 4000K	6. TRIM	WH White PC Polished Chrome	7. DIMMING	TR TRIAC	BK Black SN Stain Nickel			
			7 Ø 7" 11 Ø 11"				35 3500K		SK Stain Nickel						