

TYPE: PROJECT: CATALOG#: LED DOWNLIGHT




## Product Features

GP-SEDE-120 is a compact and adjustable recessed LED downlight with simple and multiple head choice. Recessed housing with hanger bar. It is the best choice for shop and general lighting

IP20 IESNA LM-80 IESNA LM-79 5 YEARS LIMITED WARRANTY INCLUDED

## Product Specifications

Model	SEDE-140-T1	SEDE-140-T2	SEDE-140-T3
Lumen Output	3000 lm	6000 lm	9000 lm
Power Consumption (W)	30 W	60 W	90 W
Input Voltage	120-277V AC		
Colour Temperature (CCT)	2700K, 3000K, 3500K, 4000K		
CRI	Ra 90		
Dimensions (mm)	276 x 276 x 222	275 x 365 x 222	465 x 225 x 218
Beam Angle	15°, 24°, 36°		

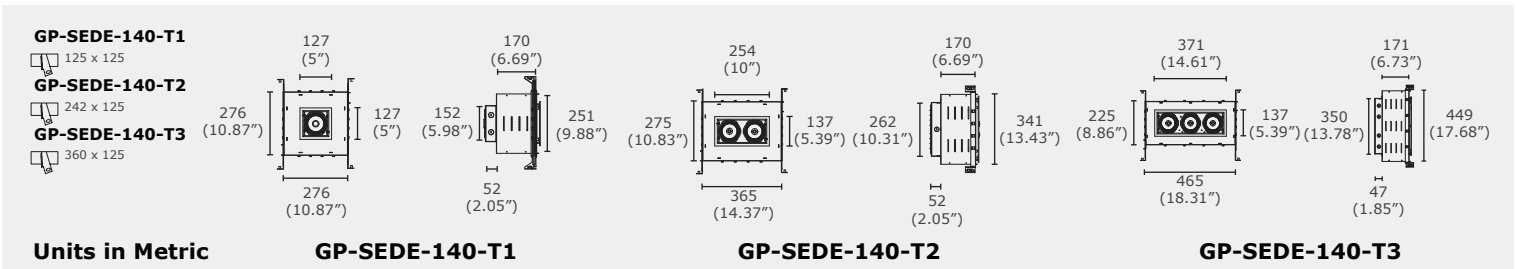

## Order Form

GP	SEDE-140	3	4	5	6	7	8
Series	Model						
<b>3. WATTAGE</b>	<b>4. VOLTAGE</b>	<b>5. CCT</b>	<b>6. BEAM ANGLE</b>	<b>7. HOUSING</b>	<b>8. LENS</b>		
30 30 W	A 120-277V AC	27 2700K	15 15°	BK Black	GL Glass		
60 60 W		30 3000K	24 24°	WH White	DF Diffusing Filter		
90 90 W		35 3500K	36 36°	GR Grey	SF Smooth Filter		
		40 4000K			HC Honey Comb		