GC-FCVM

TYPE: | PROJECT: | CATALOG#: | 5 in 1 Dimming LED Driver

Product Features

- Constant Voltage type, fine tune of output voltage
- Short-circuit, over-temperature, over-load protection
- High-quality aluminum housing for dry, damp, wet location
- Triac Dim Mode: 5 in 1 dimming

IP66 RATED & TESTED | 5 YEARS LIMITED WARRANTY INCLUDED

Product Specifications

Model	GC-FCVM-120	GC-FCVM-180	GC-FCVM-192
Max Load	2*60 W	3*60 W	2*96 W
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Output Voltage	2*12V, 2*24V DC	3*12V DC	2*24V, 2*48V DC
Dimensions	8.58” x 4.74” x 1.65”	8.58” x 4.74” x 1.65”	8.58” x 4.74” x 1.65”

Model	GC-FCVM-288	GC-FCVM-300	GC-FCVM-384
Max Load	3*96 W	5*60 W	4*96 W
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Output Voltage	3*24V, 2*48V DC	5*12V DC	4*24V, 4*48V DC
Dimensions	10.15” x 4.74” x 1.65”	10.15” x 4.74” x 1.65”	10.15” x 4.74” x 1.65”

Technical Drawing

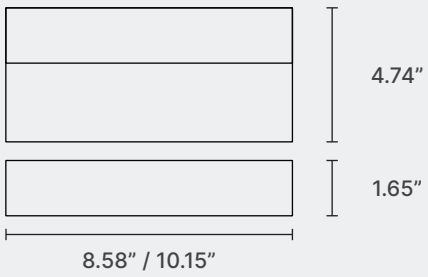

GC-FCVM

Order Form

GC	-	FCVM	-		-		-		-	
Series		Model		3		4		5		6

3. WATTAGE

120	120 W	**288**	288 W
180	180 W	**300**	300 W
192	192 W	**384**	384 W

4. INPUT

A	120-277V AC

5. OUTPUT

12	12V DC
24	24V DC
48	48V DC

6. DIMMING

DIM	5 in 1 Dimming (Triac/0-10V/1-10V/10V PWM/Poteniometer dimming)

greenimagetech.com
105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992
© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.