

TYPE: PROJECT: CATALOG#: LED STRIP LIGHT




## Product Features

The XID flexible strip light is a low voltage and high brightness slim profile ideal for a multitude of applications. Available in 5 meter rolls, can be cut to needed length and includes pre-applied double-sided adhesive for mounting.

## Product Specifications

Model	GS-50XID	GS-50XID2
Lumen Output	8,640 lm (1,728 lm/m)	
LED Quantity	1200	
Power Consumption	96 W (19.2 W/m)	100 W (20 W/m)
Efficacy	90 lm/W	86.4 lm/W
Input Voltage	12V DC, 24V DC	12V DC, 24V DC
Colour Temperature	3000K, 3500K, 4000K, 5000K	
Dimensions	5000 x 15 x 3.2 mm	5000 x 17 x 3.2 mm
CRI	Ra80	
IP Rating	IP20	IP65
Beam Angle	120°	

## Technical Drawing

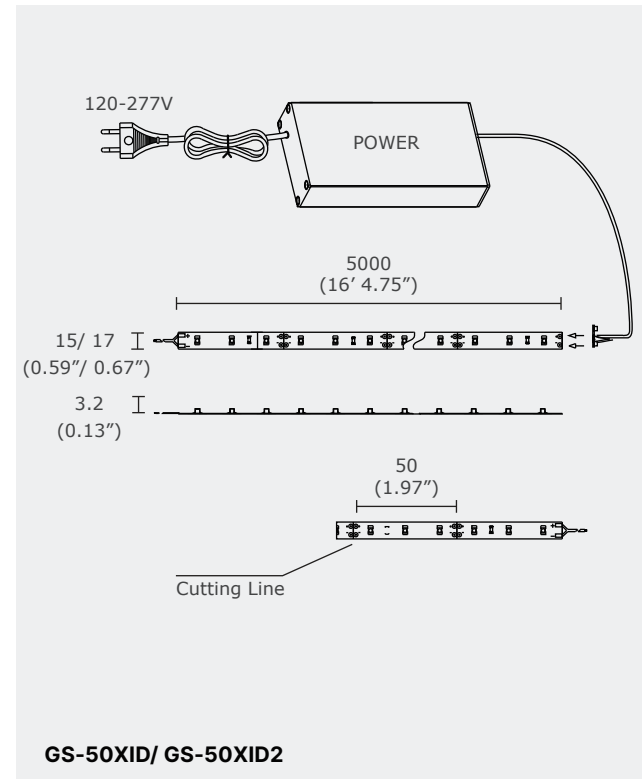

## Order Form

GS	Series	Model	3	4	5
<b>2. MODEL</b>	<b>3. LENGTH</b>	<b>4. VOLTAGE</b>	<b>5. CCT</b>		
XID XID	50 5000 (5m)	A 12V DC	30 3000K 40 4000K		
XID2 XID2		B 24V DC	35 3500K 50 5000K		

|TYPE:

|PROJECT:

|CATALOG#:

LED STRIP LIGHT

## Plug-In Power Supplies and Accessories

Part Name	Description
ACDC24-12	24W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/12VDC.
ACDC48-12	48W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/12VDC.
ACDC96-12	96W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/12VDC.
ACDC24-24	24W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/24VDC.
ACDC48-24	48W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/24VDC.
ACDC96-24	96W Plug and Play power supply. Includes AC wall plug and play and female power output plug for easy installation. 120VAC/24VDC.
GS-ID-C8	DC strip to Power Connector



**Plug and Play power supply**



**DC strip to Power Connector**

## Hardwire Power Supplies and Accessories

Part Name	Description
GC-ECV	60W, 96W Triac Dimming driver
GC-FCVM	120W, 180W, 192W, 288W, 300W, 384W Triac Dimming driver
GC-FCV	30W, 60W, 96W, 100W, 120W, 150W, 200W, 300W Triac Dimming driver
GC-SCV	30W, 60W, 96W, 100W, 120W, 150W, 200W, 300W Triac Dimming driver
GC-SCVM	120W, 180W, 192W, 288W, 300W, 384W Triac Dimming driver



**TRIAC Dimming LED Driver (GC-FCV, SCV, SCVM)**



**5 in 1 Dimming LED Driver (GC-FCVM)**



**Mini Constant Voltage Driver (GC-ECV)**

|TYPE:


|PROJECT:

|CATALOG#:


LED STRIP LIGHT

## Quick Connectors


Part Name	Description
GS-ID-C3	Strip to Power Connector. Available in static colour and RGB
GS-ID-C1	Strip to Power 3" Connector. Available in static colour and RGB
GS-ID-C5	Strip to strip Coupler. Available in static colour and RGB
GS-L001	L Connector. Available in static colour and RGB
GS-T003	T Connector. Available in static colour and RGB
GS-ID-C4	+ Connector




**Strip to Power Connector**




**Strip to Strip Connector**




**Static - 2 Wires**




**RGB - 4 Wires**



**L Connector**



**T Connector**



**+ Connector**

## Controllers

Part Name	Description
GC-2820WRGB	Wall mount RGB Controller. Touch screen RGB controller
GS-2822WCCT	Wall mount CCT Controller. Touch screen CCT controller
GC-2102DMX	DMX512 Decoder provides an addressable DMX signal to be used within a DMX controlled system
GX-2818RF	RGB wireless Controller. 10 preset modes
GC-1009-4V1	RGB wireless Decoder. Synchronization of multiple runs from one controller



**Wall mount RGB Controller**



**DMX512 Decoder**



**RGB wireless Decoder**