GN-FL-600

TYPE: | **PROJECT:** | **CATALOG#:** | **LED CEILING LIGHT**

Product Features

- LED ceiling light with round aluminum housing for optimal cooling
- Microprismatic cover ensures visual comfort
- RGBW up-light function for decorative ambiance
- Available in 4 versatile mounting options

5 YEARS LIMITED WARRANTY INCLUDED | DIMMABLE | IESNA LM-79 | IESNA LM-80 | IP20

Technical Drawing

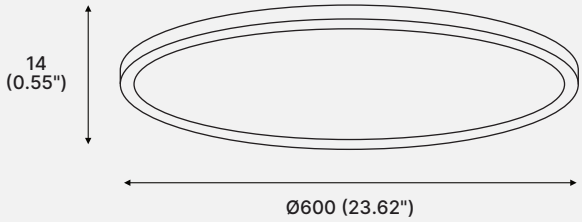

Product Specifications

Model	GN-FL-600-40	GN-FL-600-50
Lumen Output	4,900 lm	6,000 lm
Power Consumption	40 W	50 W
Colour Temperature	3000K, 3500K, 4000K	3000K, 3500K, 4000K
Efficacy	122 lm/W	120 lm/W
Input Voltage	120-277V AC	120-277V AC
Dimension	Ø600 × 14 mm	Ø600 × 14 mm
CRI	Ra80	Ra80
Beam Angle	90°	90°
Working Temperature	-20°C ~ 40°C	-20°C ~ 40°C

Order Form

GN - FL-600 - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____

SERIES | MODEL | 3. WATTAGE | 4. VOLTAGE | 5.CCT | 6. CRI | 7. HOUSING | 8. DIMMING | 9. ACCESSORIES | 10. OPTION

3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. HOUSING		8. DIMMING		9. MOUNT		10. OPTION	
40	40 W	**A**	120-277V AC	**30**	3000K	**R80**	Ra80	**BK**	Black	**NN**	None	**CS**	Cable Suspension	**RGBW**	RGBW Uplight
50	50 W			**35**	3500K			**WH**	White	**DM**	0-10V	**RS**	Rod Suspension		
				40	4000K					**TR**	TRIAC	**SM**	Surface Mount		
												RC	Recessed Mount		

greenimagetech.com
105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992
© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.