GP-3LGS

TYPE: PROJECT: CATALOG#: LED TILTABLE DOWNLIGHT

Product Features

- Durable design with high efficiency and functionality
- Multiple beam angles available with anti-glare trim
- Adjustable trim tilts up to 25° for versatile applications
- Suitable for all typical downlight uses, IP-rated

5 YEARS LIMITED WARRANTY INCLUDED | IESNA LM-79 | IESNA LM-80 | CE | ENERGY STAR | ETL Intertek | WET LOCATION | IC RATED

Technical Drawing

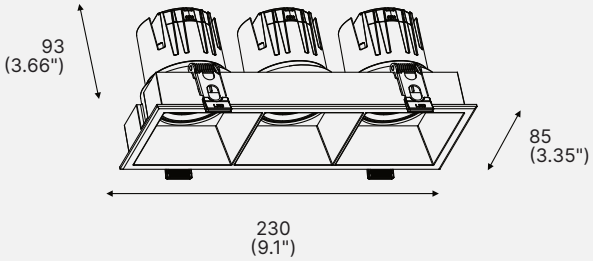

Product Specifications

Model	GP-3LGS-12
Lumen Output	3,600 lm
Power Consumption	12*3 W
Colour Temperature	2700K, 3000K, 3500K, 4000K
Efficacy	100 lm/W
Input Voltage	120-277V AC
Dimension	230 × 85 × 93 mm
Cut Out	220 × 80 mm
CRI	Ra90
Beam Angle	13°, 24°, 38°, 60°
IP Rating	Wet Location
IC Rated	No
Working Temperature	-20° ~ 45°C

Order Form

GP - 3LGS - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____

SERIES | MODEL | 3. WATTAGE | 4. VOLTAGE | 5.CCT | 6. CRI | 7. DIMMING | 8. BEAM | 9. FINISH | 10. REFLECTOR

3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. DIMMING		8. BEAM		9. FINISH		10. REFLECTOR	
12	12*3 W	A	120-277V AC	27	2700K	R90	Ra90	DM	0-10V	13D	13°	WH	White	___	Default
				30	3000K			TRI	Triac	24D	24°	BK	Black	AG	Ani-Glare
				35	3500K					38D	38°				
				40	4000K					60D	60°				

greenimagetech.com
105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992

© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

TYPE: PROJECT: CATALOG#: LED TILTABLE DOWNLIGHT

Finish & Reflector Options

WH - White / Default

BK - Black / Default

AG - White or Black / Anti Glare

greenimagetech.com
105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992

© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.