


TYPE: PROJECT: CATALOG#: **RECESSED DOWN LIGHT**

Product Features


- Ultra-miniature recessed LED downlight
- Flexible lighting schemes and multiple dimming options
- Extruded aluminum alloy main body
- Superior glare control

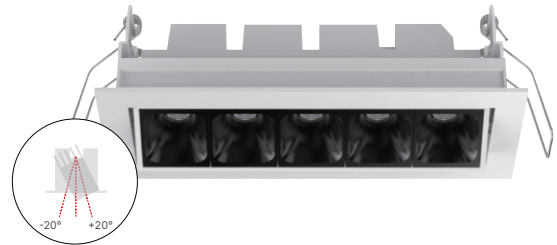

5 YEARS LIMITED WARRANTY INCLUDED

  IP20 IP65 IESNA LM-80 IESNA LM-79 DIMMABLE

Technical Drawing

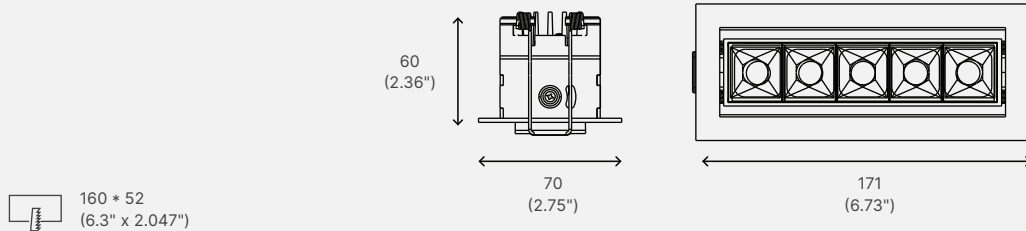

Product Specifications

Model	GP-LA5
Lumen Output	825 (±25) lm
Power Consumption	13 W
Colour Temperature	2700K, 3000K, 3500K, 4000K
Efficacy	63.5 lm/W
Input Voltage	120V AC
Dimension	70 × 171 × 60 mm
CRI	Ra80, Ra90
Beam Angle	24°, 40°
IP Rating	IP20, IP65
Working Temperature	-20° ~ +40°C

Order Form


GP		LA5																			
SERIES		MODEL		3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. BEAM		8. IP		9. TRIM		10. REFLECTOR		11. DIMMING	
3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. BEAM		8. IP		9. TRIM		10. REFLECTOR		11. DIMMING					
13	13 W	A	120V AC	27	2700K	R80	Ra80	24D	24°	20	IP20	BK	Black	SV	Silver	NN	None				
				30	3000K	R90	Ra90	40D	40°	65	IP65	WH	White	GD	Gold	DM	0-10V				
				35	3500K									WH	White			TRI	TRIAC		
				40	4000K									BK	Black						

TYPE: PROJECT: CATALOG#: RECESSED DOWN LIGHT

Secondary Reflector




Black

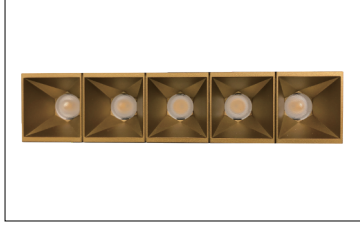

Gold




Silver

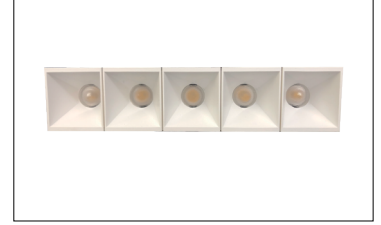


White

Trims

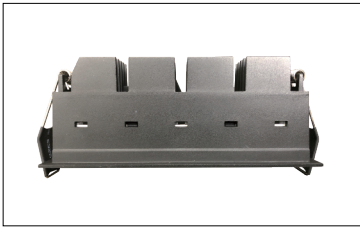

Black

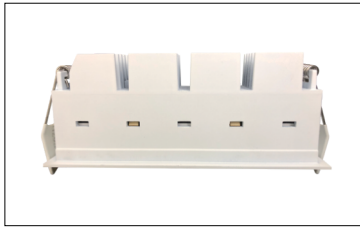

White