GP-LGC

TYPE: **PROJECT:** **CATALOG#:** **LED TILTABLE DOWNLIGHT**

Product Features

- Durable design with high efficiency and functionality
- Multiple beam angles available with anti-glare trim
- Adjustable trim tilts up to 25° for versatile applications
- Suitable for all typical downlight uses, IP-rated

5 YEARS LIMITED WARRANTY INCLUDED | IESNA LM-79 | IESNA LM-80 | CE | WET LOCATION | IC RATED

Technical Drawing

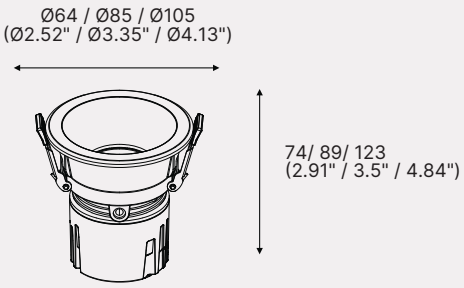

Product Specifications

Model	GP-LGC-7	GP-LGC-12	GP-LGC-20
Lumen Output	700 lm	1,200 lm	2,000 lm
Power Consumption	7 W	12 W	20 W
Colour Temperature	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
Efficacy	100 lm/W	100 lm/W	100 lm/W
Input Voltage	120-277V AC, 120-347V AC	120-277V AC, 120-347V AC	120-277V AC, 120-347V AC
Dimension	Ø64 × 74 mm	Ø85 × 89 mm	Ø105 × 123 mm
Cut Out	Ø55 mm	Ø80 mm	Ø95 mm
CRI	Ra90	Ra90	Ra90
Beam Angle	13°, 24°, 38°, 60°	13°, 24°, 38°, 60°	13°, 24°, 38°, 60°
IP Rating	Wet Location	Wet Location	Wet Location
IC Rated	Yes	Yes	No
Working Temperature	-20° ~ 45°C	-20° ~ 45°C	-20° ~ 45°C

Order Form

GP - LGC - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____

SERIES | MODEL | 3. WATTAGE | 4. VOLTAGE | 5.CCT | 6. CRI | 7. DIMMING | 8. BEAM | 9. FINISH | 10. REFLECTOR | 11. HOUSING

3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. DIMMING		8. BEAM		9. FINISH		10. REFLECTOR		11. HOUSING	
7	7 W	**A**	120-277V AC	**27**	2700K	**R90**	Ra90	**DM**	0-10V	**13D**	13°	**WH**	White	**___**	Default	**UNV-23**	MP-UNV-23354
12	12 W	**B**	120-347V AC	**30**	3000K			**TRI**	Triac	**24D**	24°	**BK**	Black	**AG**	Ani-Glare	**UNV-34**	MP-UNV-346
20	20 W			**35**	3500K					**38D**	38°					**IC-NC**	IC Rated Housing
				40	4000K					**60D**	60°						

greenimagetech.com
105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992
© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

TYPE: PROJECT: CATALOG#: LED TILTABLE DOWNLIGHT

Finish & Reflector Options

WH - White / Default

BK - Black / Default

AG - White or Black / Anti Glare

New Construction Mounting Plate



MP-UNV-23354

2-3-3.5-4 inch new construction pre-mounting plate

Size: Ø2-1/8"(54mm), Ø2-7/8"(72mm), Ø3-3/4"(95mm), Ø5-1/4"(132mm)



MP-UNV-346

3-4-6 inch new construction pre-mounting plate with hanger bars

Size: Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm)

IC Rated Housing

IC-NC

Allows housing to be completely covered with insulation

* Size varies. Please contact us for details.

105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992
© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.