GP-S29

TYPE: **PROJECT:** **CATALOG#:** **LED HANDRAIL LIGHT**

Product Features

- Compatible with ≥50×50 mm stainless steel/aluminum handrails (0.8–3mm thick)
- IP67 waterproof with 3M sealed internal connectors
- Operates on 12V or 24V LED power supply

5 YEARS LIMITED WARRANTY INCLUDED · CE · IP67 RATED & TESTED · RoHS · IESNA LM-79 · IESNA LM-80

Technical Drawing

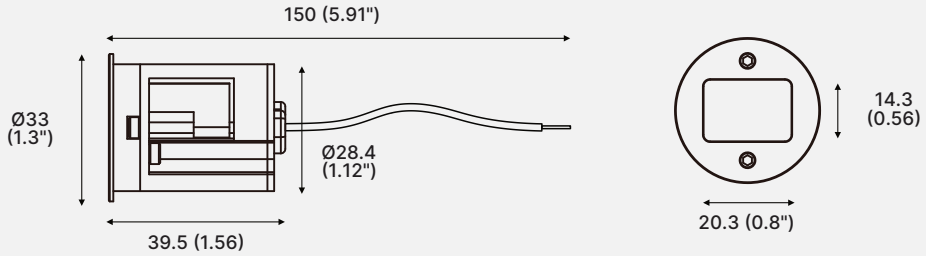

Product Specifications

Model	**GP-S29**
Lumen Output	110 lm
Power Consumption	1.5W
Colour Temperature	2700K, 3000K, 4000K
LED	1 PCS
Efficacy	73.3 lm/W
Input Voltage	24V DC
Dimension	Ø33 × 39.5 mm
CRI	Ra80
Beam Angle	65°
IP Rating	IP67
Lifetime	> 30,000 hrs
Working Temperature	-45°C ~ 40°C

Order Form

GP - S29 - ____ - ____ - ____ - ____ - ____

SERIES · MODEL · 3. WATTAGE · 4. VOLTAGE · 5. CCT · 6. CRI · 7. DIMMING

3. WATTAGE		4. VOLTAGE		5. CCT		6. CRI		7. DIMMING	
1.5	1.5 W	**A**	24V DC	**27**	2700K	**R80**	Ra80	**NN**	None
				30	3000K			**DM**	0-10V
				35	4000K				

greenimagetech.com

105-8288 N Fraser Way
Burnaby BC, V3N 0E9

T: (604) 207-9879
F: (604) 207-6992

© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

Installation Instruction

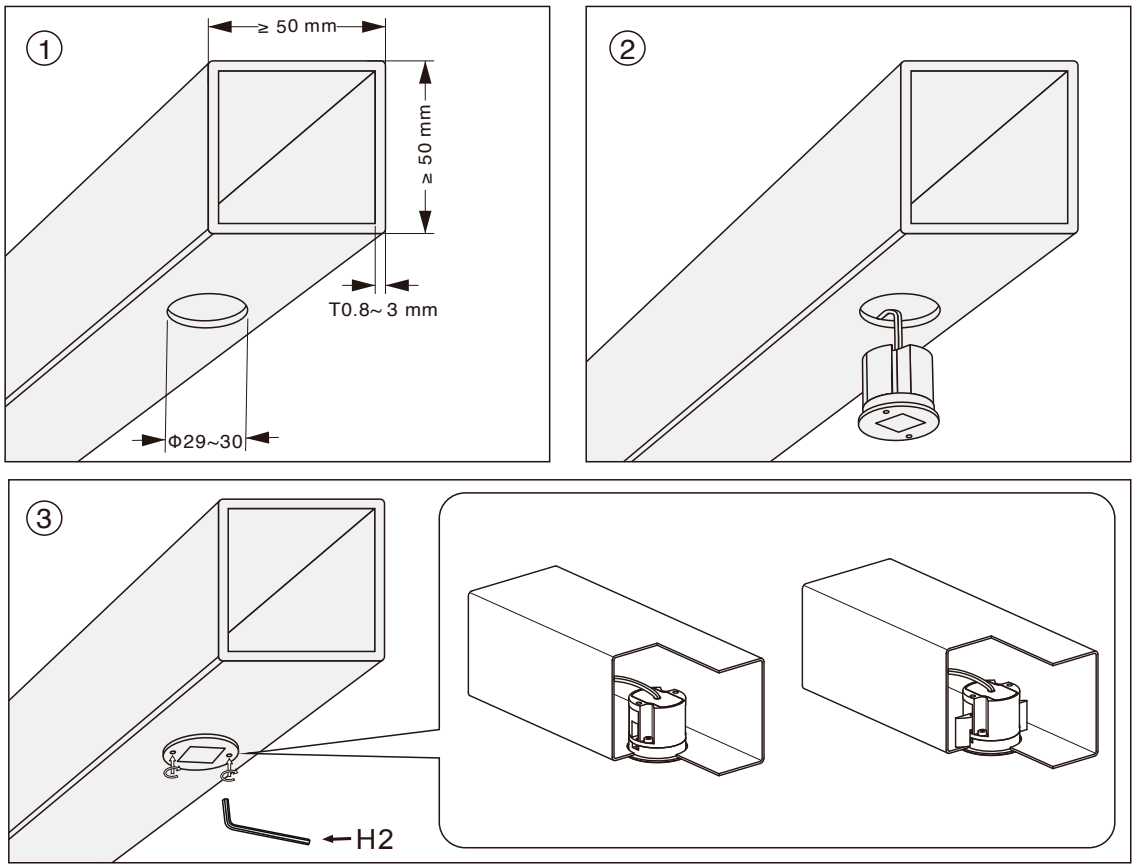

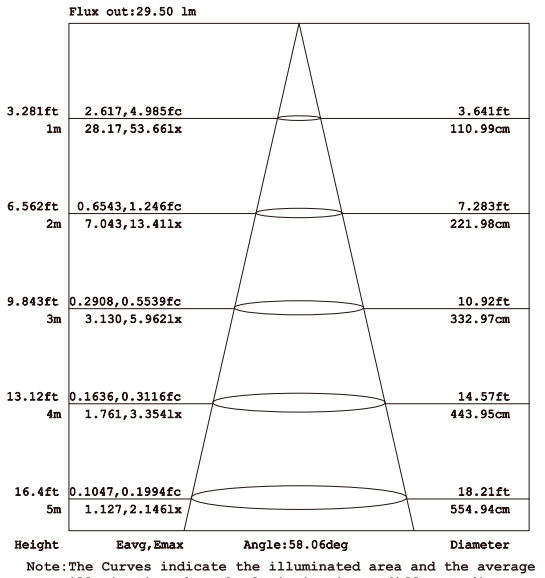

Effective Average Illuminance

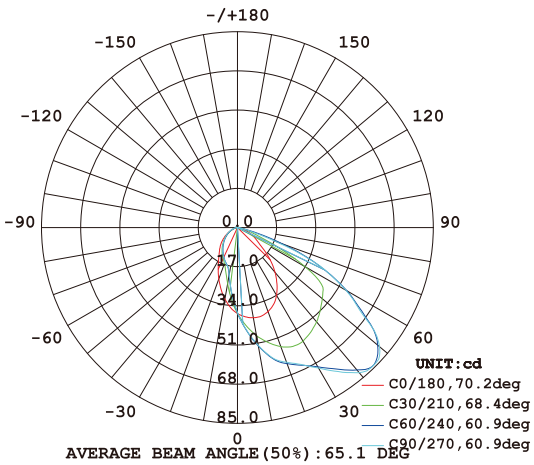

Light Distribution Curve

105-8288 N Fraser Way
Burnaby BC, V3N 0E9
T: (604) 207-9879
F: (604) 207-6992

© Green Image Tech, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.